



2501 Ludelle Street
Fort Worth, Texas 76105
817-244-6212 phone
817-244-4024 fax
800-423-9696 Tech

E-Mail: painless@painlessperformance.com
Web: www.painlessperformance.com

70973


ClassicBraid Kit for 2nd Gen Camaro Harnesses 20112, 20113 & 20114

Contents

2 ft 1 inch ClassicBraid
2 ft 3/4 inch ClassicBraid
33 ft 1/2 inch ClassicBraid
70 ft 5/16 inch ClassicBraid
41 ft 3/16 inch ClassicBraid
40 7 inch tie wraps
100 4inch tie wraps
1 roll Black electrical tape
2 rolls Self-Vulcanizing tape
1 ft 1/2 inch heat shrink
2 ft 3/8 inch heat shrink
2.5 ft 1/4 inch heat shrink

- Before applying the ClassicBraid on the harness, be sure to have all breakouts separated to their specific destination.
- After laying out the harness take the time to replace all existing tie wraps with the black electrical tape that is supplied with the ClassicBraid kit. This step will make the installation much easier.
- Using the correct diameter loom for each wire section, install the ClassicBraid. When finished with each section, cut any extra length of ClassicBraid with a sharp pair of scissors and then secure it using the supplied self vulcanizing tape to wrap the ends. This will keep the ClassicBraid from fraying. The ends that do not have connectors attached from Painless Performance the heat shrink, provided with the kit, can be used to seal ends instead of the tape.

Using installation tools , Painless part #70941, will simplify the installation process of the ClassicBraid. The series of photos below show installation using the tool.

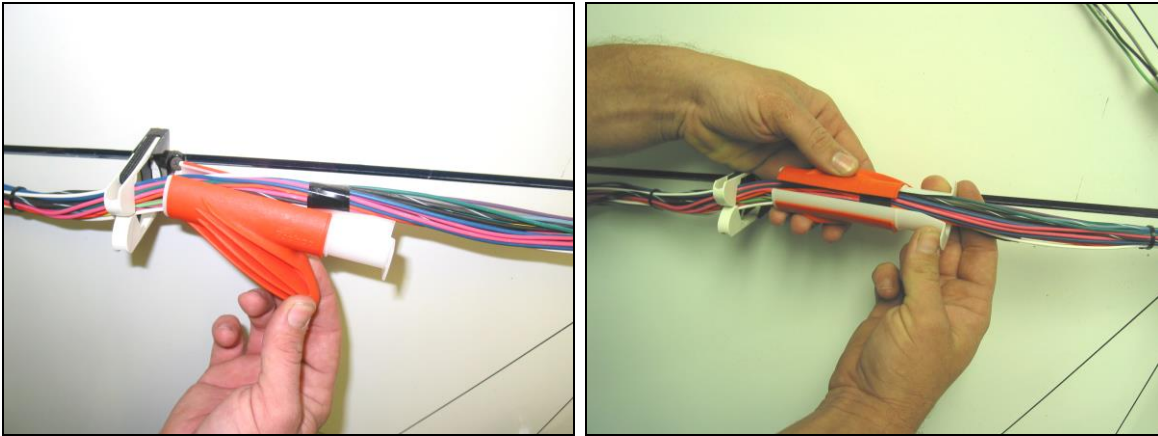

The wire is inserted into the tool. The tool is then closed around the wire



The “spreader” of the tool is then inserted into the ClassicBraid. With the tool inserted, pull the tool down the length of the ClassicBraid. This will insert the harness into the braid as it is pulled.

Performance Limited Warranty and Return Policy

Chassis harnesses, fuel injection harnesses and Striker ColdShot are covered under a lifetime warranty. All other products manufactured and/or sold by Painless Performance are warranted to the original purchaser to be free from defects in material and workmanship under normal use. Painless Performance will repair or replace defective products without charge during the first 12 months from the purchase date. No products will be considered for warranty without a copy of the purchase receipt showing the sellers name, address and date of purchase. You must return the product to the dealer you purchased it from to initiate warranty procedures.

Copyright © 2007 by Perfect Performance Products, LLC